
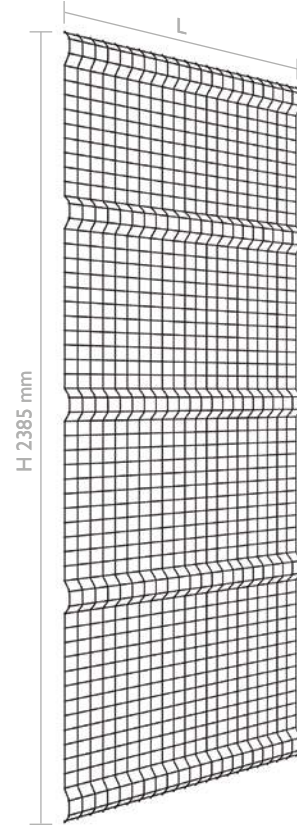


DISTANCE FROM DANGEROUS AREAS  $\geq 200\text{mm}$

- Mesh dimensions:  $40 \times 40 \times \varnothing 4 \text{ mm}$
- Non-standard width on request (pitch 44mm)
- Available in powder coated steel or stainless steel
- Standard colours: black RAL 9005
- Non-standard colours, also based on sample (additional charge)

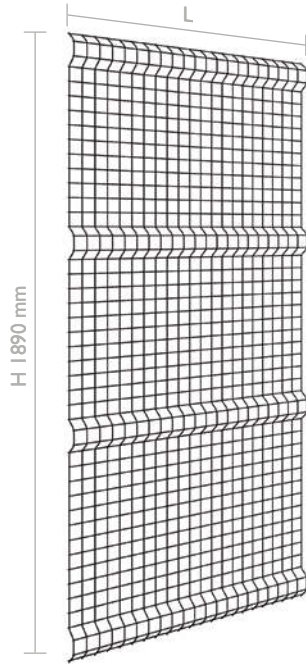

Mod.	H [mm]	L [mm]
<b>012</b>	1890	2512
<b>013</b>	1890	1984
<b>014</b>	1890	1456
<b>015</b>	1890	1148
<b>016</b>	1890	928
<b>017</b>	1890	708
<b>018</b>	1890	444
<b>019</b>	1890	224

Mod.	H [mm]	L [mm]
<b>022</b>	2385	1984
<b>023</b>	2385	1456
<b>024</b>	2385	1148
<b>025</b>	2385	928
<b>026</b>	2385	708
<b>027</b>	2385	444
<b>028</b>	2385	224



SKATTO plate - Captive fastening system in compliance with the Machinery Directive 2006/42/EC



Hinge for angles other than  $90^\circ$